

# Recognition of Traffic Sign for Driver Assistance Systems

<sup>1</sup>S.Mohamed Al Ameen, <sup>2</sup>V.Ganapathy

<sup>1</sup>PG Scholar, <sup>2</sup>Professor

<sup>1</sup>Department of Information Technology, SRM University, Chennai, India

<sup>1</sup>[mohameds\\_saleem@srmuniv.edu.in](mailto:mohameds_saleem@srmuniv.edu.in), <sup>2</sup>[ganapathy.v@ktr.srmuniv.ac.in](mailto:ganapathy.v@ktr.srmuniv.ac.in)

**Abstract**— This paper deals with the automatic detection and recognition of traffic sign boards in Indian roads to alert the driver. A camera fitted in the car captures the video and sends the data to an in-vehicle computing device. We propose a four stage algorithm that detects the traffic signs using YCbCr colour space and shape based filtering. The detected traffic signs are tracked and recognized using interest point descriptors. The algorithm is robust and can detect signs even when the traffic sign board is rotated. The traffic sign template database can be updated easily. The method is aimed at achieving high accuracy in recognizing traffic signs at real-time, with a low computational cost. Reduced computational complexity of the algorithm enables the implementation of the proposed method in embedded systems for driver assistance.

**Index Terms**— Traffic Sign detection, Colour Segmentation, YCbCr Colour space, Interest Point Descriptors.

## I. INTRODUCTION

Traffic sign detection is an consequential step in providing advanced driver assistance system inside the car, mapping data for GIS (geographical information systems) and also developing autonomous (self-driving) cars. At times, the warning signs on the sides of the road become difficult to notice and the driver may sometimes miss important warning notes. These warning notes may be speed breaker ahead or narrow bridge or even accident zone etc. This issue becomes critical at night time. Sometimes because of the traffic or the road condition, the driver may not be able to read the sign and if he tries to read it with a wide eye there may be a chance for the driver to lose concentration on the road.

The project aims at developing a solution for this problem using image processing technique. By placing a camera in the car, it can pick up road signs and send it to a system that processes the image.

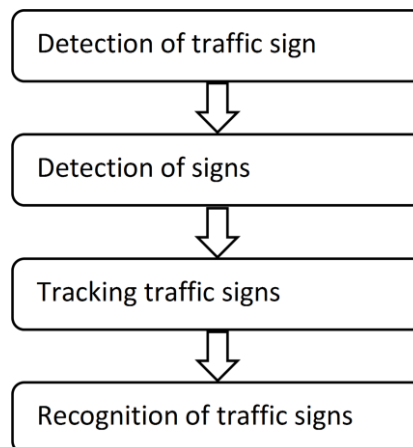


Figure 1 Design flow for traffic sign recognition

The objective of this work is to process real-time video frames, detect traffic signs and match the detected signs to a database of traffic signs for successful recognition. The Main components of the proposed computer vision design flow are shown in figure 1. Section A presents the initial phase of the algorithm which extracts traffic signs based on primary colour used on traffic sign board. Section B shows the validation of traffic signs using shape based filtering. Section C shows the tracking of traffic signs and the recognition of traffic sign using interest point descriptors is discussed in Section D.

## II. RELATED WORKS

The automatic sign detection is has been an emerging field of research in recent years. Many car companies are integrating this system such as Ford Focus which can display the certain number of detected traffic signs in the instrument panel [1]. This information will be helpful for the driver and it can improve the road safety. Also many researches are carried out for the automatic detection of traffic signs [2], [3], [4].

RGB colour space is used by various systems [5], it used for identification of traffic signs. Color information can be a better feature for traffic sign analysis [4].

Other than colour another important characteristics used are shape based detection of traffic signs. Some techniques have been used segmentation by sing shape based parameter, such as template matching (match with template picture), radial based symmetry [8] and corner detection.

A fast interest point detector can be used based on SURF (Speeded Up Robust Features) algorithm which was first introduced in 2006 by Bay et al. [7]. So for detection of traffic signs various methods have been developed.

### III. PROPOSED SYSTEM

We proposed the system for the detection and recognition of Indian traffic signs and this method has three stages: Video capturing, detection and the recognition phase and it is shown in fig 2.

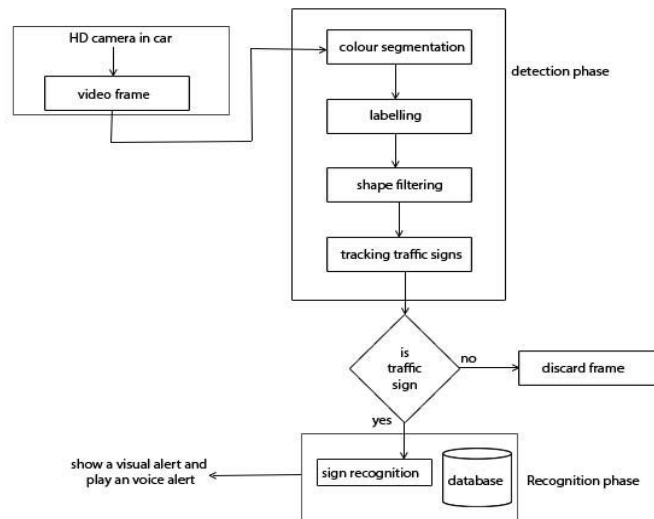


Fig 2

The camera in the car take the videos of the road side traffic signs and the frames are sampled from the video which is taken by the camera. Each frame is subjected to colour space conversion. Colour extraction and shape parameter analysis is done for the detection of traffic sign location. We look for some patterns in consecutive frames and track the traffic signs. If it exists, then perform recognition using predefined templates. Alert the driver by playing the corresponding voice for recognized traffic signs.

#### A. DETECTION OF TRAFFIC SIGN LOCATION

Traffic signs have two major features: Shape (square, circle, triangle, hexagon etc.) and Color (red, yellow, orange, white, black, green). Detecting shapes in an urban environment is very challenging and unreliable due to visual clutter. On the other hand, traffic signs deliberately use raw/primary colors that stand out. Hence, color information can be a better feature for traffic sign analysis [5]. It is important to note that this work is primarily concerned with the day time detection of traffic signs. Night time would be different due to low light conditions and reflections.

The video which is taken by the HD camera in the car is send to the computing device inside the car via HDMI connection. Each and every frame is extracted from the video and it is subjected to colour segmentation and shape based filtering to detect the location of traffic signs.

##### 1) COLOUR SEGMENTATION

All the compulsory traffic signs are mainly in red colour. Hence by extracting the red colour from the frame, we can get the location of the traffic signs. For extraction and analyzing the colour information, there are several methods available. RGB colour space is the default colour space of the image. But RGB colour space is not suitable for because it does not provide linear space for colour variation. So RGB image is converted into YCbCr colour space. YCbCr defines colour via one luminance value and two chrominance values i.e. Y carries luminance (brightness), Cb plane carries blue Chroma and Cr plane carries red Chroma. We are taking only the Cr plane to extract the red colour in the picture.

After the extracting red colour the output will be binary image. To close the open are we do a morphological operation. After closed area is bounded by box. The fig 3 represents the image which is taken in day time, fig 4 and fig 5 is Cb and Cr plane of the fig 1 respectively. Fig 6 shows Cb plane after morphological operation and fig 7 shows Cr plane after morphological functions.



Fig 3 Image captured during daylight



Fig 4 Cb Plane



Fig 5 Cr Plane



Fig 6. Cb Plane closing

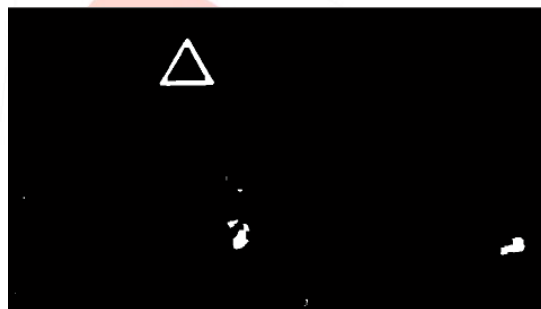


Fig 7. Cr Plane after closing

## 2) LABELLING

After color extraction and morphological operations, multiple boundary boxes are detected. Next, these areas are separated from each other using a labelling operation. This step finds the shapes of the boundary boxes and labels them in order to get potential coordinates of traffic signs.

Detection of traffic sign locations is computationally very complex and require large memory accesses and pixel per pixel scanning. Typical image size used is  $1280 \times 720 = 921600$  pixels. We use a fast labelling algorithm proposed by Wu et al., which requires only two passes to label an image [10].

## B. DETECTION OF TRAFFIC SIGNS

The second part of the algorithm handles the sorting and detection of actual traffic signs from the list of boundary boxes obtained. Initially, we trained a classifier using color and shape data, however results were not promising due to irregular traffic sign shapes encountered due to viewing angle, distortion and other effects. This can be done by shape based filtering.

### 1) SHAPE FILTERING

In India, the alert signs are represented by triangle and compulsory signs are represented by circle. So by taking the two circle and triangle shape, we can filter or validate the detected boxes.

Shape based filtering is based on template matching. The output of labelling is cropped picture of detection red colours. First it is resized to  $150 \times 150$  pixels and it is matched with the templates by normalized cross correlation technique. It matched even in the angle of up to  $\pm 15$  degrees. It checks for the similarity and if it is more than certain threshold rate then the detected boxes is valid signs, if it less than certain value then it will be ignored.

The output is input image with bounding box for detected sign is shown in Fig 8.

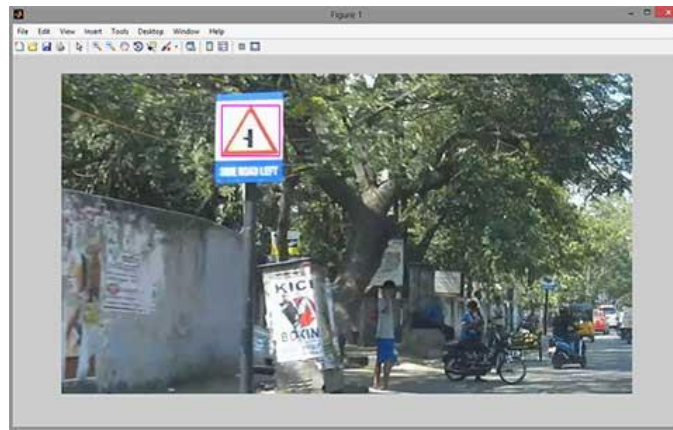


Fig 8. Detected traffic signs as warning signs

**C. TRACKING OF TRAFFIC SIGNS**

In tracking phase, we double check the sign by finding whether the same sign exists in the consecutive frames. In this phase the bounding box matching is done to know if sign exists in more than one frames and hence it is a valid target.

**D. RECOGNITION IF TRAFFIC SIGNS**



Fig 8. Detected traffic signs as warning signs

Recognition of the traffic signs is the last process in this algorithm. The traffic signs are stored in the database. This algorithm matches the detected signs with the database templates stored in the database. The performance of matching can be improved with the help of neural network concepts. But it is the time consuming process. Using norm squared difference is straightforward, however it fails to work when the traffic signs are distorted, marked or seen from an angle. As an alternative, a fast interest point detector can be used based on SURF (Speeded Up Robust Features) algorithm which was first introduced in 2006 by Bay et al. [10]. SURF can be used as a detector (finding interesting points at distinctive locations in the image such as blobs, corners etc.) and a descriptor (a feature vector representing the neighborhood of interest points). More importantly, descriptor vectors can be matched between different images to find any correspondence among images. Specifically, we use the Upright-SURF (USURF) [9] which can maintain robustness for image rotations of up to +/- 15 degree and can be executed in real-time. Fig 9 shows how SURF algorithm can match two traffic signs even if one is slightly rotated. It also shows that it can differentiate signs which resemble each other.

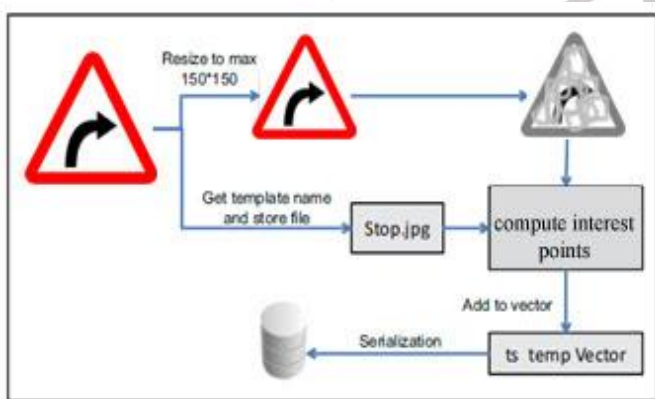


Fig 10. SURF database detection for traffic sign templates

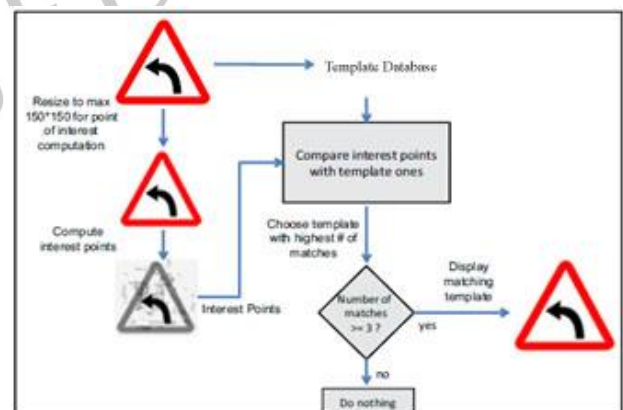


Fig 11. Recognition of traffic signs using interest point descriptor

We create a SURF database program for creating templates for each traffic sign. (See Fig 10). Each traffic sign is sized to be 150 \* 150 pixels. Next, we develop the last stage of the algorithm which performs the matching operation with the detected boundary boxes and the SURF database as shown in Fig 11. Here, the interest points computed for the current boundary box are compared to each group of interest points contained in the vector to template. If the number of matches is not greater or equal to 3, we discard the boundary box (it was a false positive from detection stage). Average interest points calculation time (for 150x150 pixels) was 0.25 sec using U-SURF algorithm.

#### IV. CONCLUSION

This paper presents a new method for real-time recognition of traffic signs. The proposed algorithm is based on YCbCr color space, Shape based filtering, use of discriminative features and Fast interest point descriptor. The algorithm has robust performance and it can detect signs even if the sign board is slightly rotated and the traffic sign template database can be easily updated. Reduced computational complexity of the algorithm enables a real-time operation with embedded systems, making it feasible for in-car applications.

#### V. REFERENCES

- [1] Ford Focus Traffic Sign Recognition (online) available: <http://www.ford.co.uk/Cars/Focus/Drivingexperience>.
- [2] C. Bahlmann, Y. Zhu, V. Ramesh, M. Pellkofer, and T. Koehler, "A system for traffic sign detection, tracking and recognition using color, shape, and motion information," in IEEE Intelligent Vehicles Symposium, June 2005, pp. 255–260.
- [3] A. Ruta, Y. Li, and X. Liu, "Real-time traffic sign recognition from video by class-specific discriminative features," Pattern Recognition, vol. 43, no. 1, pp. 416–430, January 2010.
- [4] J. Hatzidimos, "Automatic traffic sign recognition in digital images," in Proceedings of the International Conference on Theory and Applications of Mathematics and Informatics, ICTAMI, april 2004, pp. 174–184.
- [5] M. Benallal and J. Meunier, J. "Real-time color segmentation of road signs," in Proceedings of the Electrical and Computer Engineering Conference, Canada, vol. 3, pp.1823-1826, 2003
- [6] Marcin L. Eichner, Toby P. Breckon, "Integrated Speed Limit Detection and Recognition from Real-Time Video" in IEEE International Intelligent Vehicles Symposium: 626–631.
- [7] H. Bay, T. Tuytelaars, and L. V. Gool, "Surf: Speeded up robust features," in In ECCV, 2006, pp. 404–417.
- [8] W. J. Kuo and C. C. Lin, "Two-stage road sign detection and recognition," in IEEE International Conference on Multimedia and Expo, pp. 1427–1430, July 2007.
- [9] Y. Sato, T. Sugimura, H. Noda, Y. Okuno, K. Arimoto, and T. Nagasaki, "Integral-image based implementation of u-surf algorithm for embedded super parallel processor," in Intelligent Signal Processing and Communication Systems, 2009. ISPACS 2009. International Symposium on, January 2009, pp. 485–488.
- [10] K. Wu, E. Otoo, and K. Suzuki, "Optimizing two-pass connectedcomponent labeling algorithms," Pattern Analysis & Applications, vol. 12, pp. 117–135, 2009.

